




A2®N™ SSMR Clamp



- Pre-assembled clamp allows for easy installation
- Non-penetrating push-pin design does not damage the panel
- Available for one, two or three-hole brackets
- Engineered for 1.5" snap-lock SSMR seams
- All stainless-steel hardware
- *Installs in half the time of competitive products**

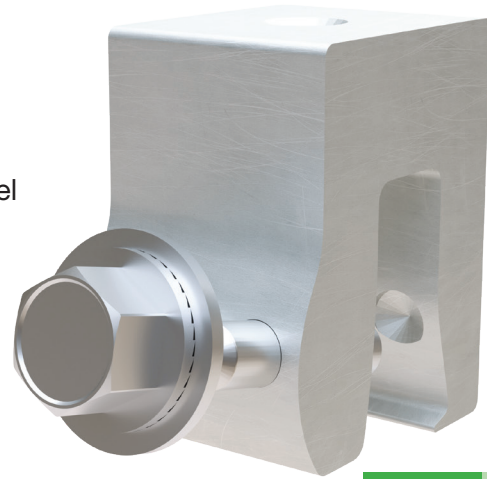

Shown: Part# 5056-N



Specifications

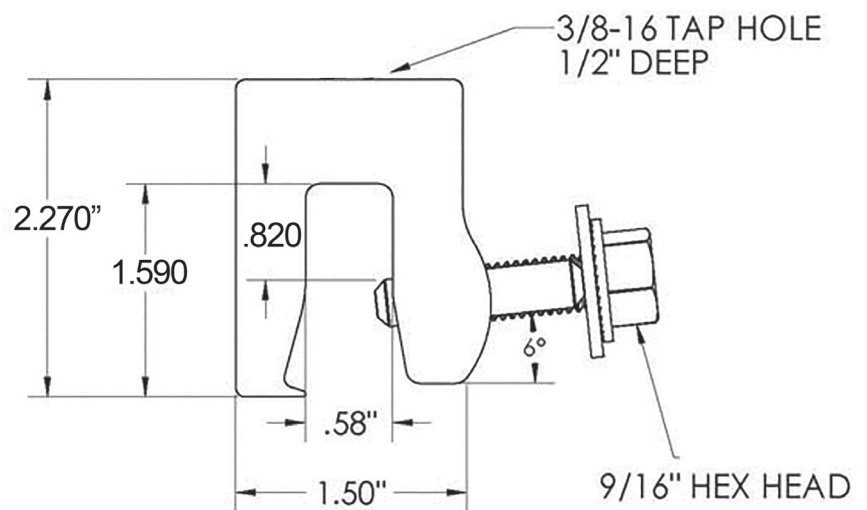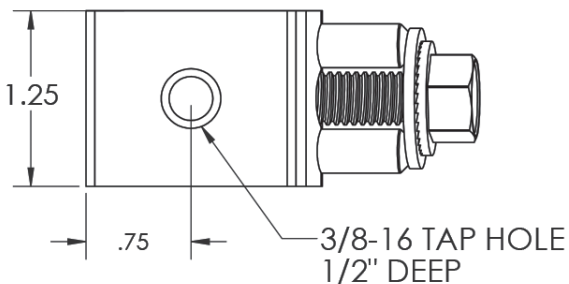

RECOMMENDED TORQUE SPECS

	22ga steel	Aluminum	Copper
A2®-N™	195	165	n/a

The above is a general recommendation which varies by material type and panel thickness. For additional panel profiles and torque specs visit www.AceClamp.com

**ACE
CLAMP®**
Innovative Roofing Solutions™

a product of
PMC Industries Inc

87 Spring Lane | Plainville, CT 06062
860-351-0686

*Based on typical contractor experiences. Photos shown are for representative purposes only. Actual product may vary. Design subject to change without notice. Additional panel profiles & torque specs: aceclamp.com. Always use proper safety equipment when working on a roof. Not responsible for typographical errors.

V260928