



A2@T Clamp

- Modeled after the ML™ and offers side versus top securing, making it *more versatile for solar applications*
- Pre-assembled clamp allows for a quick and easy installation
- Non-penetrating sliding pin design does not damage the panel
- High wind-load resistance
- Available for two or three-hole brackets (2-6 inches in height)
- Engineered for bulb-style and T-panel seams
- Manufactured in aircraft quality aluminum, brass or stainless steel
- All stainless-steel hardware
- *Installs in half the time of competitive products**





Shown: Part# 5056-T



FULLY ASSEMBLED
CLAMPS READY TO INSTALL

Specifications

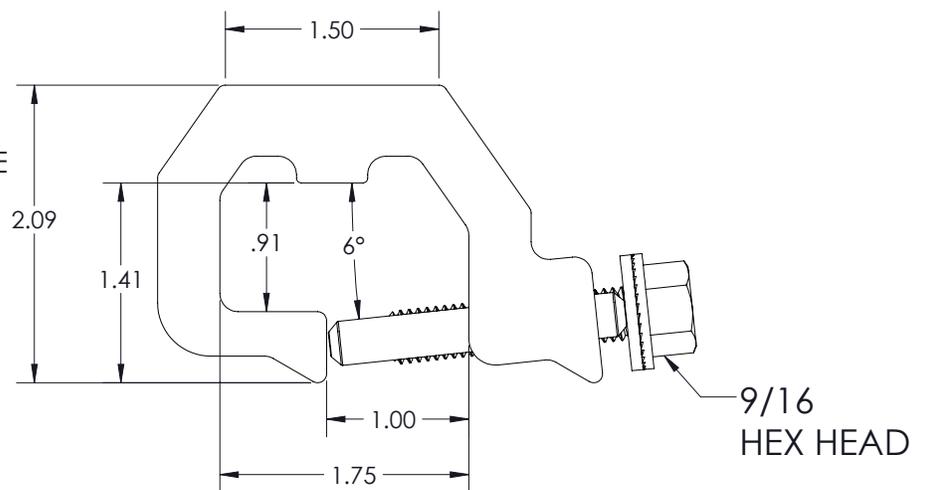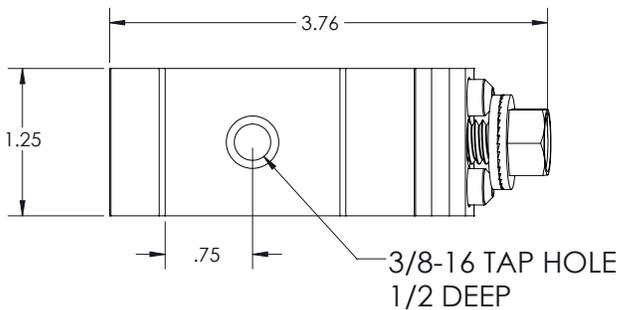

RECOMMENDED TORQUE SPECS

	24ga steel	Aluminum	Copper
A2@T	175	135	n/a

The above is a general recommendation which varies by material type and panel thickness. For additional panel profiles and torque specs visit www.AceClamp.com

ACE CLAMP®
Innovative Roofing Solutions™

a product of
PMC Industries Inc.

87 Spring Lane | Plainville, CT 06062
860-351-0686

*Based on typical contractor experiences. Photos shown are for representative purposes only. Actual product may vary. Design subject to change without notice. Additional panel profiles & torque specs: aceclamp.com. Always use proper safety equipment when working on a roof. Not responsible for typographical errors.

v260317