






A2® Nw™ SSMR Clamp

- Pre-assembled clamp allows for easy installation
- Non-penetrating push-pin design does not damage the panel
- High wind-load resistance
- Also compatible with our patented Solar-Kit or L-Foot for attaching directly to any racking system
- All stainless-steel hardware
- *Installs in half the time of competitive products**

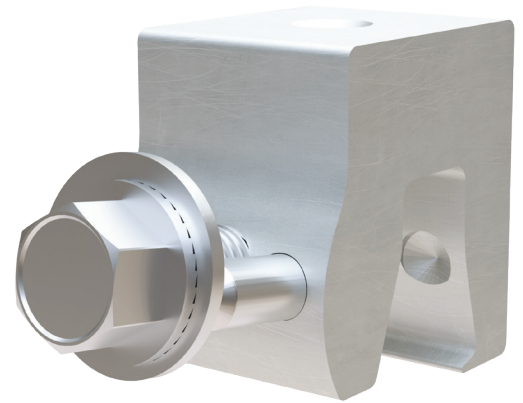

Shown: Part# 5119-1

Specifications

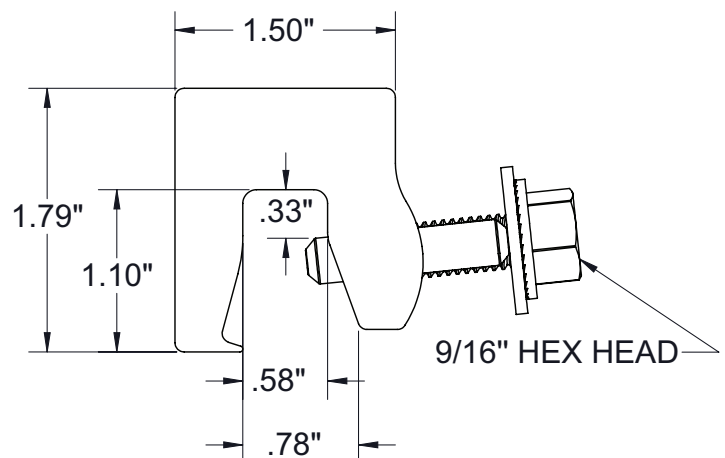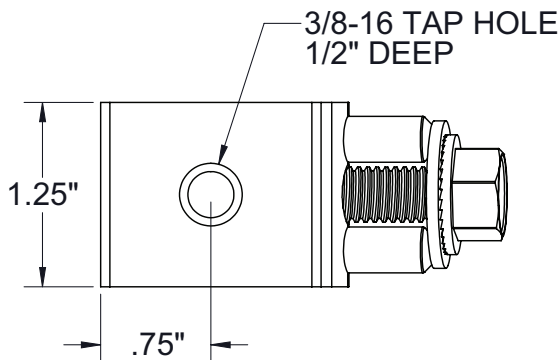

RECOMMENDED TORQUE SPECS

	24ga steel	Aluminum	Copper
A2®-Nw™	175	165	n/a

The above is a general recommendation which varies by material type and panel thickness. For additional panel profiles and torque specs visit www.AceClamp.com

Not recommended for 29 gauge roof or up.